


Wall mounted inlet

Part number: 75389

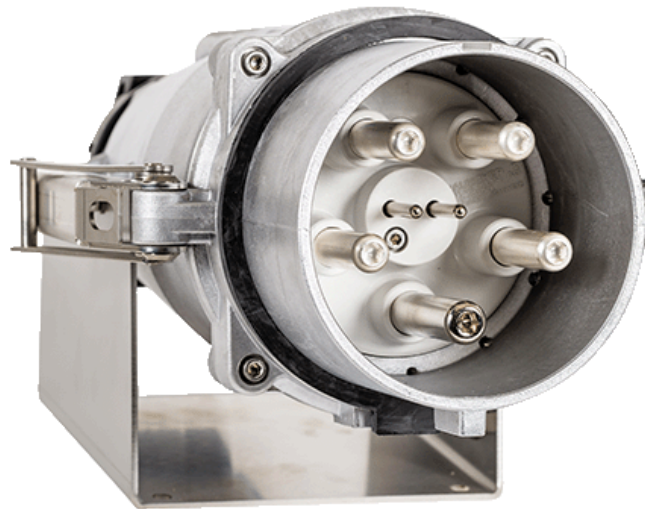

MENNEKES
Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1
57399 Kirchhundem
GERMANY

www.MENNEKES.org

Product Description

- highly heat resistant contact carrier, silver plated contacts
- external fixing
- 10° inclination
- MetalLine
- aluminium enclosure
- seawater resistant products are available on request

Technical Details

| Wall mounted inlet | 75389 |
|---|---|
| Ampere | 400A |
| Number of poles | 4p |
| Clock position | 6h |
| Nominal voltage AC | 400V |
| Nominal frequency | 50 - 60 Hz |
| Protection type IP | IP67 |
| Contact carrier | highly heat resistant contact carrier, silver plated contacts |
| Connection | cage terminals |
| Tightening torque connection terminal | allen key |
| Phase inverter | without phase inverter |
| Pilot contact | 2 pilot contacts |
| Blind cable entry at the rear | no |
| Enclosure base can be turned 180° | no |
| Insertion direction | angled |
| Inclination | 10° |
| Type of mounting | external fixing |
| Military version | no |
| Protection cap | without protection cap |
| Tightening torque connection terminal | 16 Nm |
| Recommended wire end treatment for supply cable connection terminal | usable with and without ferrule |
| Strip length jacket | 200 mm |
| Strip length conductor | 60 mm |
| Conductor cross-section min. | 70 mm ² |

| | |
|------------------------------------|---------------------|
| Wall mounted inlet | 75389 |
| Conductor cross-section max. | 240 mm ² |
| Conductor cross-section pilot max. | 4 mm ² |
| Weight (net) | 10560 g |
| Packaging unit | 1 Stück |
| Quantity per pallet | 18 Stück |
| EAN / identification number | 4015394152422 |

| Permissible ambient conditions | | |
|--------------------------------|--------|--------|
| | Min. | Max. |
| Permanent ambient temperature | -40 °C | 100 °C |

| Material properties | |
|---------------------|-------------------------------------|
| Housing | aluminium grey [no RAL colour code] |
| External screws | bare stainless steel |

Material resistance

The material resistance overview can be found on the website in the section “Knowledge” - “Product knowledge” - “Materials”.

| Material and environmental properties | |
|---------------------------------------|-----|
| RoHS 2011/65/EU incl. 2015/863/EU | ✓ |
| POP regulation (EU) 2019/1021 | ✓ |
| Halogen-free | yes |

| Regulations and Standards | |
|---------------------------|------------------|
| Norm | DIN EN IEC 60309 |
| Declaration of Conformity | CE |
| Test label | EAC |

Dimensional Drawing

Drawing
2 MB 200/1

Dim. in mm

